

ASX RELEASE

1 November 2021

ASX CODE: SNG

BOARD

Brian Rodan
Managing Director

Paul Angus
Technical Director

Keith Murray
Non-Executive Director

HEAD OFFICE

Level 2,
41 – 43 Ord Street
West Perth WA 6005

t: +61 8 6458 4200
e: admin@sirengold.com.au
w: www.sirengold.com.au



Continued High Grade Drillhole Intersections at Alexander River

Siren Gold Limited (ASX: **SNG**) (**Siren** or the **Company**) is pleased to provide an update on its recent exploration activities.

Highlights

- Drilling has continued to target the McVicar West shoot, with 8 diamond holes intersecting the structure that now extends down plunge for over 200m and is open at depth. Five holes contain visible gold. The average thickness and grade of the drillholes to date is 4.1m @ 6.1g/t Au. AXDDH063, the deepest hole drilled in the shoot intersected 9.9m @ 6.4g/t Au, including 4.9m @ 12.0g/t Au. A 0.7m quartz reef with visible gold assayed 43.1g/t Au.
- Drilling recommenced at Bull. AXDDH059 was drilled between AXDDH016 (8m @ 2.6g/t Au) and AXDDH033 (5.2m @ 5.3g/t Au) and intersected 7.4m @ 3.3g/t Au. The intersection was like other mineralised zones intersected at Bull comprising moderately silicified acicular arsenopyrite mineralisation. Drilling to date indicated that the average thickness and grade of the Bull shoot is 6.7m @ 2.9g/t Au.
- Two diamond drill holes have been completed at Golden Point. Both holes were drilled approximately 500m south of the historic Golden Point mine. GPDDH02 intersected a mineralised shear zone between 29.9m and 36.3m (6.4m). There is quartz veining on the hangingwall and footwall that has very high arsenic (~10,000ppm) values indicated by the pXRF. The intervening area is brecciated and has low to moderate arsenic. It appears that the shear zone dips steeply to the west. The mineralisation has similarities to Bull at Alexander River, but assay results are awaited. These are the first holes ever drilled in the Golden Point shear zone.

Exploration Activities

Alexander River

The Alexander River project (comprised of Exploration Permit 60446) is located ~26 km southeast of Reefton. The Alexander River project overlays the areas of the historic Alexander River Mine until it closed in 1943, which produced 41,089 oz of gold at an average gold recovered grade of ~26g/t.

Diamond drilling commenced at the Alexander River project in September 2020, with a total of 66 holes drilled to date, with two holes in progress for a total of 8,407m. Forty-six holes for 6,985m have been drilled in 2021 (Table 3). Results have been received for 56 holes to date (Table 4).

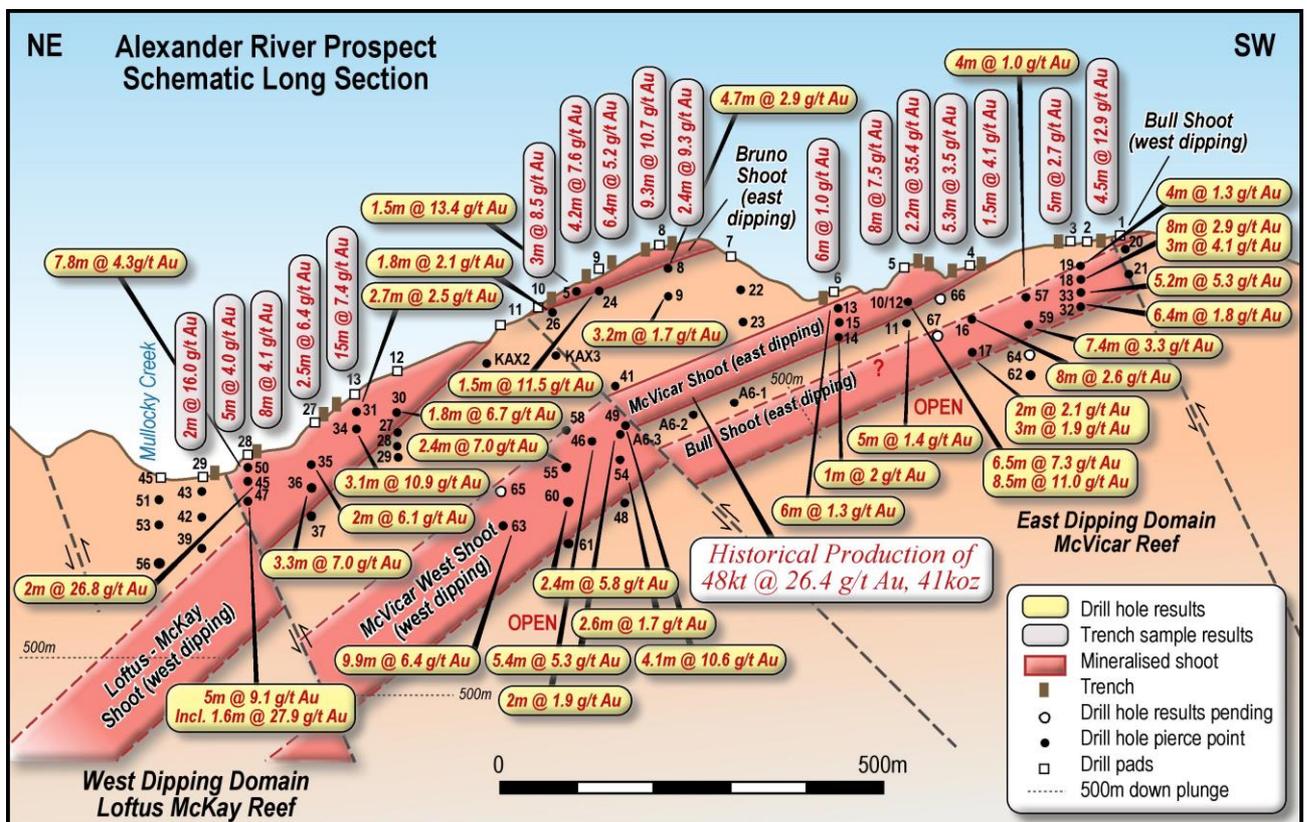


Figure 1. Schematic long section through Alexander reef system.

McVicar West Shoot

Drilling has continued to target the McVicar West shoot, with 8 diamond holes intersecting the structure that now extends down plunge for over 200m and is open at depth. Five holes contain visible gold. Results have been received for all holes except AXDDH065 (Table 4 and Figure 1). The average thickness and grade of the drillholes to date is 4.1m @ 6.1g/t Au (Table 1). AXDDH063 is the deepest hole drilled in the shoot to date and intersected 9.9m @ 6.4g/t Au, including 4.9m @ 12.0g/t Au (Figure 1 and Figure 4). A 0.7m quartz reef with visible gold assayed 43.1g/t Au (Figures 4 and 5). As expected, the shoot thickness pinches and swells and ranges from 2.0m to 9.9m with an average of 4.1m. The grade is also variable but, significantly, five of the eight holes contain visible gold and, with relatively wide spaced drilling (100m x 50m) and small core samples, this variability is expected.

The McVicar West exploration target was based on extending the shoot for 500m down plunge from Level 6 of the McVicar mine. Drilling has now confirmed the shoot extends to at least 250m, with the best intersection to date open at depth. The aim of the drilling over the remainder of the year and the first quarter of 2022 is to extend the shoot down plunge to 500m (400m below the surface) for resource estimation.

Table 1. McVicar West shoot diamond drillhole intersections.

Hole ID	From	To	Interval	Au (g/t)	Visible Au
A6-3			5.4	5.3	no
AXDDH046	208.0	210.0	2.0	1.9	no
AXDDH049	198.5	202.6	4.1	10.6	yes
AXDDH054	210.3	213.0	2.7	1.7	yes
AXDDH055	214.6	217.0	2.4	7.0	yes
AXDDH060	221.0	223.4	2.4	5.8	yes
AXDDH063	261.1	271.0	9.9	6.4	yes
Average			4.1	6.1	





Figure 2. Core photos of AXDDH055 in the McVicar West shoot.





Figure 3. AXDDH060 core in the McVicar West shoot.







Figure 4. AXDDH063 core in McVicar West Shoot.



Figure 5. Visible gold in AXDDH063 core that assayed 43.1g/t Au.

Bull Shoot

Drilling recommenced at Bull to further test the Bull shoot and drill deeper, as previous drilling ended in mineralisation. However, depth extensions were limited due to the rig capacity of around 220m HQ. Six diamond holes have been completed with results received for three holes. AXDDH059 was drilled between AXDDH016 (8m @ 2.6g/t Au) and AXDDH033 (5.2m @ 5.3g/t Au) and intersected 7.4m @ 3.3g/t Au (Figure 1). The intersection was similar to other mineralised zones intersected at Bull comprising moderately silicified acicular arsenopyrite mineralisation (Figure 6). Drilling to date indicated that the average thickness and grade of the Bull shoot is 6.7m @ 2.9g/t Au (Table 2) and the shoot extends down plunge for at least 350m and is open at depth.

Table 2. Bull shoot diamond drillhole intersections.

Hole ID	From	To	Interval	Au (g/t)	Visible Au
AXDDH016	62.0	70.0	8.0	2.6	no
AXDDH017	108.0	110.0	2.0	2.1	no
	113.0	116.0	3.0	1.90	no
AXDDH018	26.0	34.0	8.0	2.9	no
AXDDH032	125.0	131.4	6.4	1.8	no
AXDDH033	117.0	123.0	5.2	5.3	no
AXDDH059	127.0	134.4	7.4	3.3	no
Average			6.7	2.9	





Figure 6. AXDDH059 core in the Bull Shoot.

Loftus-McKay Shoot

There has been no additional drilling in the Loftus McKay shoot. Once the small drilling rig is finished at Bull (1 or 2 more holes) it will be moved to Pad 44 to target the shoot on the NE side of the fault (Figure 1).

Golden Point

The Golden Point project is located just south of Reefton and 3kms to the west of the Globe Progress mine that produced 1.1Moz of gold. The Company was granted exploration permit EP 60648 on 19 March 2021 for an initial 5-year term. This area was previously part of the Reefton South prospecting permit. The tenement covers 4,620 hectares from which 1,357 tons recovering 410oz of gold at an average grade of 9.4g/t was historically mined between 1884 – 1908 at the Golden Point mine.

Mapping and soil sampling has extended the shear zone to the north and south of the mine and now extends for over 2-3km's along the Golden Point - Morning Star mine trend (Figure 7). The Golden Point shear zone has never been drilled.

Siren has completed two diamond drill holes at Golden Point. Both holes were drilled approximately 500m south of the Golden Point mine. This area was chosen for easy access for a track mounted rig, and soil sampling returned a 20g/t Au sample 5m below gravel cover. This area was alluvial mined for gold in the 1990's and the miner said he intersected a quartz reef with the excavator below the water level in this vicinity.

GPDDH01 was drilled 60 degrees to the east under the high-grade soil sample. The alluvial gravel was around 10m thick, and the hole was drilled to 120m but only intersected some minor quartz veining and arsenopyrite mineralisation. The greater gravel thickness indicates that the high-grade soil sample was most probably due to alluvial gold. As this sample was to the west of the projected shear zone trend, GPDDH02 was drilled 50m further to the east. This hole intersected a mineralised shear zone between 29.9m and 36.3m (6.4m). There is quartz veining on the hangingwall and footwall of the shear zone that has very high arsenic (10,000ppm) values when analysed by the pXRF. The intervening area is brecciated and has low to moderate arsenic. It appears that the shear zone dips steeply to the west. The mineralisation has similarities to Bull at Alexander River but assay results are awaited.

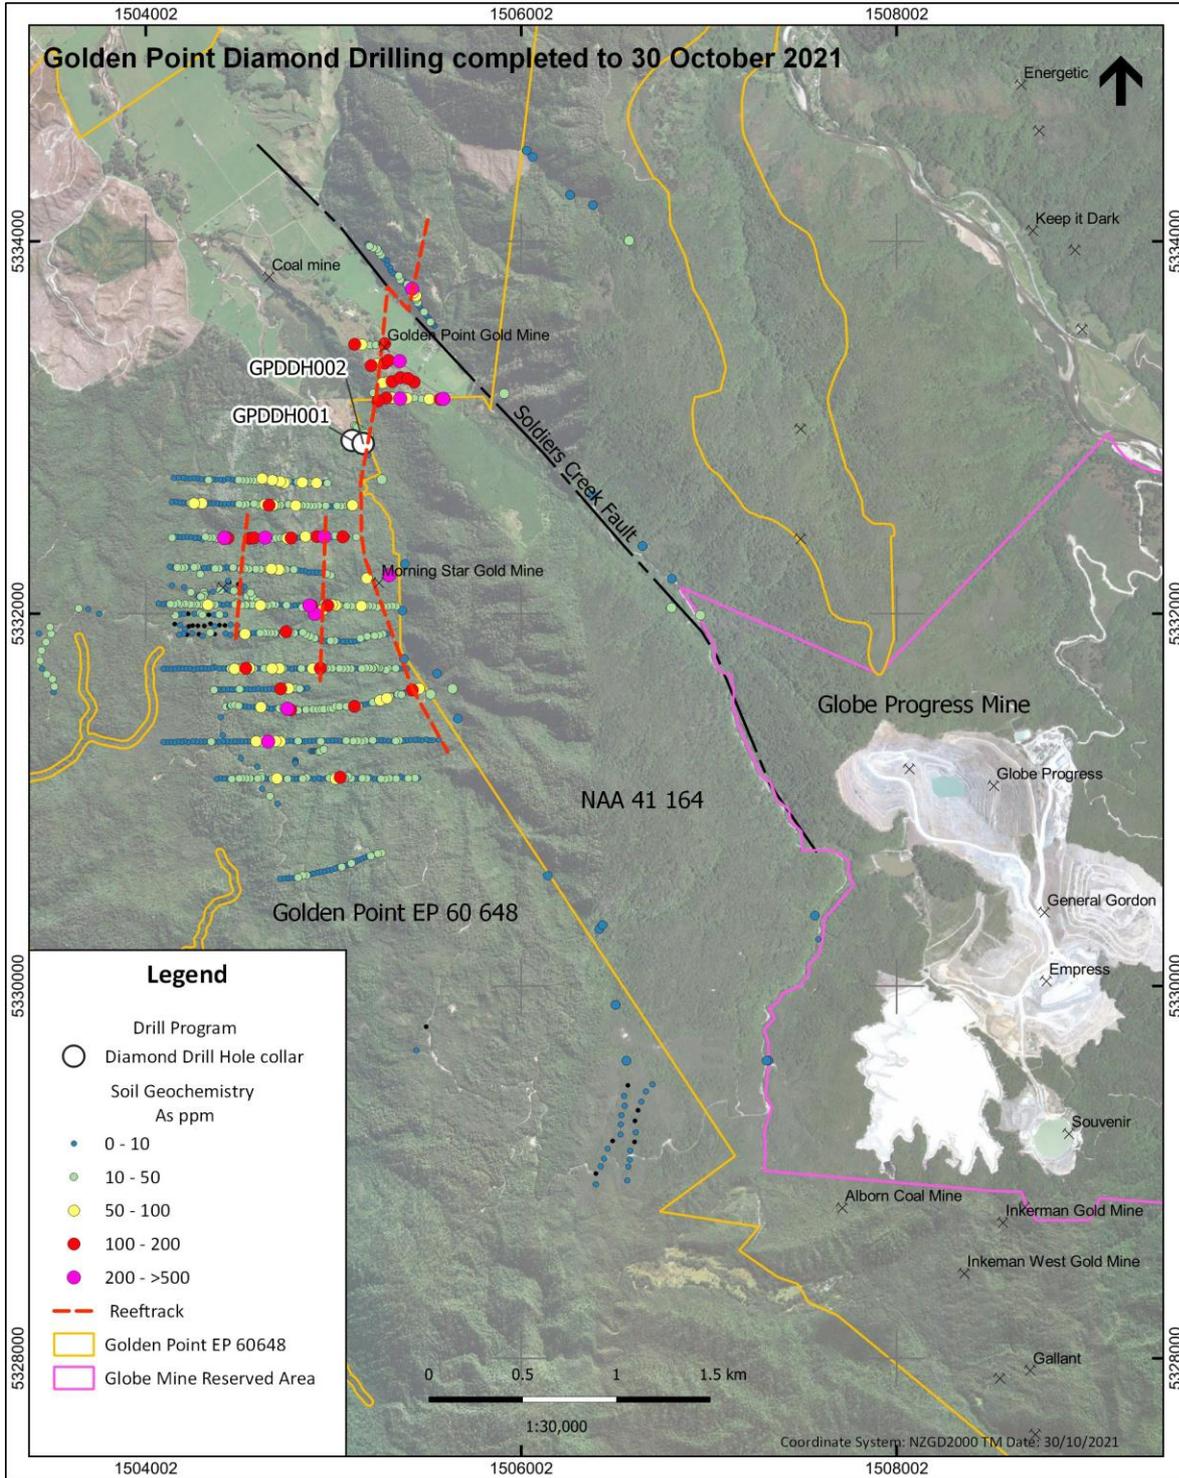


Figure 7. Golden Point showing the reef track, arsenic soil geochemistry and location of diamond holes GP01 and GP02.

Table 3. Alexander River drilling data.

Hole Number	Hole ID	Pad	Easting	Northing	Dip Azimuth	Total Depth
1	AXDDH008	8	1513206	5312727	-60/320	96.7
2	AXDDH009	8	1513206	5312727	-82/320	110.0
3	AXDDH010	5	1512936	5312598	-60/320	61.2
4	AXDDH011	5	1512936	5312598	-85/320	70.3
5	AXDDH012	5	1512936	5312598	-50/320	35.5
6	AXDDH013	6	1512989	5312639	-60/320	52.8
7	AXDDH014	6	1512989	5312639	-85/320	84.6
8	AXDDH015	6	1512989	5312639	-75/320	94.0
9	AXDDH016	4	1512861	5312540	-65/290	76.5
10	AXDDH017	4	1512861	5312540	-90/290	122.5
11	AXDDH018	3	1512737	5312498	-90/300	69.6
12	AXDDH019	3	1512737	5312498	-60/300	47.1
13	AXDDH020	1	1512692	5312438	-60/300	64.2
14	AXDDH021	1	1512692	5312438	-82/300	85.6
15	AXDDH022	7	1513130	5312673	-60/320	74.2
16	AXDDH023	7	1513130	5312673	-75/320	112.0
17	AXDDH024	9	1513270	5312764	-90/000	45.3
18	AXDDH025	9	1513270	5312764	-60/155	70.3
19	AXDDH026	10	1513331	5312814	-90/000	51.2
2020 Total						1,422.4
20	AXDDH027	12	1513385	5312992	-65/110	89.4
21	AXDDH028	12	1513385	5312992	-85/110	117.6
22	AXDDH029	12	1513385	5312992	-90/000	157.0
23	AXDDH030	12	1513385	5312992	-52/110	96.5
24	AXDDH031	13	1513426	5313038	-90/000	49.0
25	AXDDH032	32	1512775	5312427	-63/320	156.1
26	AXDDH033	32	1512775	5312427	-55/320	130.0
27	AXDDH034	13	1513426	5313038	-72/290	88.0
28	AXDDH035	27	1513420	5313093	-60/115	68.0
29	AXDDH036	27	1513420	5313093	-90/000	82.5
30	AXDDH037	27	1513420	5313093	-74/290	156.3
31	AXDDH038	29	1513463	5313225	-70/110	33.9
32	AXDDH039	29	1513463	5313225	-70/290	165.0
33	AXDDH040	38	1513320	5312638	-66/320	119.3

34	AXDDH041	38	1513320	5312638	-50/320	238.5
35	AXDDH042	29	1513463	5313225	-90/000	85.7
36	AXDDH043	29	1513463	5313225	-60/110	75.0
37	AXDDH044	38	1513320	5312638	-70/320	343.0
38	AXDDH045	28	1513454	5313172	-90/000	42.3
39	AXDDH046	40	1513215	5312885	-64/154	235.0
40	AXDDH047a	28	1513454	5313172	-68/320	10.0
41	AXDDH047b	28	1513454	5313172	-75/320	94.8
42	AXDDH048	40	1513215	5312885	-74/177	355.1
43	AXDDH049	40	1513215	5312885	-54/170	280.8
44	AXDDH050	28	1513454	5313172	-55/110	40.6
45	AXDDH051	45	1513452	5313288	-60/120	137.6
46	AXDDH052	40	1513215	5312885	-65/345	281.2
47	AXDDH053	45	1513452	5313288	-85/120	86.1
48	AXDDH054	40	1513215	5312885	-63/167	37.0
49	AXDDH054a	40	1513215	5312885	-63/167	10.0
50	AXDDH054b	40	1513215	5312885	-63/177	248.5
51	AXDDH055	40	1513215	5312885	-72/115	271.5
52	AXDDH056	45	1513452	5313288	-80/290	144.6
53	AXDDH057	16	1512802	5312461	-55/340	142.5
54	AXDDH058	45	1513452	5313288	-60/115	102.0
55	AXDDH058a	45	1513452	5313288	-60/115	243.0
56	AXDDH059	16	1512802	5312461	-71/340	141.0
57	AXDDH060	40	1513215	5312885	-81/110	253.0
58	AXDDH061	40	1513215	5312885	-90/000	311.8
59	AXDDH062	16	1512802	5312461	-90/000	225.0
60	AXDDH063	41	1513215	5313030	-63/140	291.4
61	AXDDH064	16	1512802	5312461	-83/340	173.0
62	AXDDH065	41	1513215	5313030	-63/140	265.9
63	AXDDH066	18	1512912	5312552	-53/135	74.1
64	AXDDH067	18	1512912	5312552	-53/135	126.5
65	AXDDH068	41	1513215	5313030	-90/000	30.0
66	AXDDH068a	41	1513215	5313030	-90/000	62.0
67	AXDDH069	18	1512912	5312552		22.1
2021 Total						6,985.2
Project Total						8,407.0

Table 4. Alexander River drilling results.

Hole No.	Hole ID	Pad No.	From (m)	To (m)	Interval (m)	True Thickness (m)	Au (g/t)
1	AXDDH008	8	23.3	28.0	4.7	4.5	2.9
2	AXDDH009	8	25.0	26.0	3.2	1.0	1.7
3	AXDDH010	5	28.2	35.0	6.9	5.0	7.3
4	AXDDH011	5	56.0	61.9	5.0	3.5	1.4
5	AXDDH012	5	24.0	32.5	8.5	8.0	11.0
6	AXDDH013	6	34.0	40.0	6.0	3.5	1.3
7	AXDDH014	6					nsa
8	AXDDH015	6	47.0	48.0	1.0	1.0	2.0
9	AXDDH016	4	62.0	70.0	8.0	7.0	2.6
10	AXDDH017	4	108.0	110.0	2.0	1.5	2.1
10			113.0	116.0	3.0	2.0	1.9
11	AXDDH018	3	26.0	34.0	8.0	7.0	2.9
			47.0	50.0	3.0	2.5	4.1
12	AXDDH019	3	24.0	25.0	1.0	1.0	4.1
			29.0	33.0	4.0	4.0	1.3
			38.0	39.0	1.0	1.0	2.8
13	AXDDH020	1					nsa
14	AXDDH021	1					nsa
15	AXDDH022	7					nsa
16	AXDDH023	7					nsa
17	AXDDH024	9	22.8	24.3	1.5	1.2	11.5
18	AXDDH025	9					nsa
19	AXDDH026	10	14.9	16.7	1.8	1.8	2.1
20	AXDDH027	12	62.0	64.0	4.0	4.0	0.7
21	AXDDH028	12					nsa
22	AXDDH029	12					nsa
23	AXDDH030	12	52.5	54.3	1.8	1.8	6.7
24	AXDDH031	13	23.3	26.0	2.7	2.4	2.5
25	AXDDH032	32	125.0	131.4	6.4	6.2	1.8
26	AXDDH033	32	117.0	123.0	5.2	5.2	5.3
27	AXDDH034	13	43.0	46.0	3.0	2.5	10.8
28	AXDDH035	27	46.0	48.0	2.0	2.0	6.1
29	AXDDH036	27	62.7	66.0	3.3	3.0	7.0
30	AXDDH037	27					nsa
31	AXDDH038	29					nsa
32	AXDDH039	29					nsa
33	AXDDH040	38					nsa
34	AXDDH041	38					nsa
35	AXDDH042	29					nsa
36	AXDDH043	29	41.0	41.3	0.3	0.3	4.3
37	AXDDH044	38					nsa
38	AXDDH045	28	12.0	14.4	4.4	4.4	1.5
			30.0	32.0	2.0	2.0	26.8
39	AXDDH046	40	208.0	210.0	2.0	2.0	1.9
40	AXDDH047	28	56.0	61.0	5.0	3.5	9.1
		incl	56.0	57.6	1.6	1.1	27.9
41	AXDDH048	40					nsa
42	AXDDH049	40	198.5	202.6	4.1	4.1	10.6
43	AXDDH050	28	4.2	26.0	21.8	21.8	2.3
		incl	4.2	12.0	7.8	7.8	4.3
44	AXDDH051	45					nsa

45	AXDDH052	40					nsa
46	AXDDH053	45					nsa
47	AXDDH054	40	210.3	213.0	2.7		1.7
48	AXDDH055	40	214.6	217.0	2.4	2.4	7.0
49	AXDDH056	45					nsa
50	AXDDH057	16	120.0	124.0	4.0		1.0
51	AXDDH058	40	208.4	210.9	2.5		0.8
52	AXDDH059	16	127.0	134.4	7.4		3.3
53	AXDDH060	40	221.0	223.4	2.4	2.4	5.8
54	AXDDH061	41	281.0	281.6	0.6	0.6	0.5
55	AXDDH062	16					nsa
56	AXDDH063	41	261.1	272.0	9.9	9.9	6.40

Authorised by the Board of Siren Gold Limited

Brian Rodan
Managing Director
Phone: +61 (8) 6458 4200

Paul Angus
Technical Director
Phone: +64 274 666 526

Competent Person Statement

The information in this announcement that relates to exploration results and exploration targets, is based on, and fairly represents, information and supporting documentation prepared by Mr Paul Angus, a competent person who is a member of the Australasian Institute of Mining and Metallurgy. Mr Angus has a minimum of five years' experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a competent person as defined in the 2012 Edition of the Joint Ore Reserves Committee Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves. Mr Angus is a related party of the Company, being the Technical Director, and holds securities in the Company. Mr Angus has consented to the inclusion in this announcement of the matters based on his information in the form and context in which it appears.

JORC Code, 2012 Edition – Table 1

Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code Explanation	Commentary
Sampling techniques	<ul style="list-style-type: none"> Nature and quality of sampling (e.g. cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling. Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used. Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (e.g. 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (e.g. submarine nodules) may warrant disclosure of detailed information. 	<ul style="list-style-type: none"> Soil samples were collected with a spade or auger. The C-zone was targeted with around 300gms collected. Samples were stored in waxed paper bags. Outcrop channel samples were generally collected at 1m intervals across the structure to get a true thickness. Samples were collected with a geological hammer and stored in calico bags. Diamond core (DC) was used to obtain samples for geological logging and sampling. DC core samples were split in half using a core saw at 1m intervals unless determined by lithology i.e. Quartz vein contacts. Channel samples were taken on 1m sample lengths with 1-2 kg sample size using a geological hammer. Core and channel samples were pulverised to >95% passing 75µm to produce a 30g charge for fire assay for Au. Multi-element is now undertaken by pXRF on the returned Au pulps from SGSAll core is rolled into plastic splits from the triple tube spilt at the drill rig and then placed into the core trays. This provides a far better quality of core with preservation of structures and broken core with less handling of the core.
Drilling techniques	<ul style="list-style-type: none"> Drill type (e.g. core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (e.g. core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc). 	<ul style="list-style-type: none"> Diamond drilling with DC diameters included PQ (96mm), HQ (63mm) and NQ (47.6mm) and are tripled tubed. Drilling is helicopter supported. The HQ and PQ core are orientated using Reflex orientation gear
Drill sample recovery	<ul style="list-style-type: none"> Method of recording and assessing core and chip sample recoveries and results assessed. Measures taken to maximise sample recovery and ensure representative nature of the samples. 	<ul style="list-style-type: none"> Full run and geotechnical logging with total core recoveries, RQD and core loss is recorded for each drill run. Core occurs around old workings where there are voids.

Criteria	JORC Code Explanation	Commentary
	<ul style="list-style-type: none"> Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material. 	<ul style="list-style-type: none"> Core recoveries for the program so far around 91 to 93%. Highly shattered rock around puggy fault gouge zones are the areas where core loss can occur. No noticeable bias has been observed thus far in the mineralisation.
Logging	<ul style="list-style-type: none"> Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies. Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography. The total length and percentage of the relevant intersections logged. 	<ul style="list-style-type: none"> All DC are logged for lithology, weathering, bedding, structure, alteration, mineralisation, jointing, colour and grain size using a standard set of inhouse logging codes and template that is very similar to previous logging by OceanaGold Limited (OGL) exploration programs. The logging method is quantitative. All core trays were photographed prior to core being sampled. Channel samples were logged on the same lithological categories as DC.
Sub-sampling techniques and sample preparation	<ul style="list-style-type: none"> If core, whether cut or sawn and whether quarter, half or all core taken. If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry. For all sample types, the nature, quality, and appropriateness of the sample preparation technique. Quality control procedures adopted for all sub-sampling stages to maximise representativity of samples. Measures taken to ensure that the sampling is representative of the in-situ material collected, including for instance results for field duplicate/second-half sampling. Whether sample sizes are appropriate to the grain size of the material being sampled. 	<ul style="list-style-type: none"> DC sample intervals were marked on the core, which was sawn in half lengthways with a diamond cutting saw. The resulting core was taken for the laboratory sample and remaining core was archived in the core box. Channel samples are chipped along 1m length into a sample bag. Field duplicates as quarter core, laboratory duplicates and laboratory repeats were collected and assayed. The field duplicates are DC quarter cuts taken every 25 samples. The DC (2-3 kg) and channel (1-2kg) sample sizes are considered appropriate to the grain and particle size for representative sampling. Field duplicates of the channel samples have been taken in some mineralised sections. Sample preparation of DC and Channel samples by SGS Laboratories in Westport comprises; drying, crushing, splitting (if required) and pulverising to obtain analytical sample of 250g with >95% passing 75 µm where Au is assayed by 30g fire assay by SGS Waihi. 48 element suite completed by SGS Australia is undertaken using ICP-MS up to drillholes AX23 and BR24. For later drillholes and channel samples the pulps returned from the lab were analysed by Siren with a portable XRF (pXRF).
Quality of assay data and laboratory tests	<ul style="list-style-type: none"> The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total. For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make 	<ul style="list-style-type: none"> Soil samples were sent to SGS in Westport to be analysed by low detection gold DC and Channel samples are sent to SGS Westport and Waihi, New Zealand. SGS laboratories carry a full QAQC program and are ISO 19011 certified. Multielement are sent to SGS Townsville, Australia for IMS40Q which is ICP-MS analysis after DIG40Q four acid digest. Holes drilled after AX232 and BR24 were analysed by pXRF.

Criteria	JORC Code Explanation	Commentary
	<p>and model, reading times, calibrations factors applied and their derivation, etc.</p> <ul style="list-style-type: none"> Nature of quality control procedures adopted (e.g. standards, blanks, duplicates, external laboratory checks) and whether acceptable levels of accuracy (i.e. lack of bias) and precision have been established. 	<ul style="list-style-type: none"> For each DC drillhole the sampling includes: <ul style="list-style-type: none"> At least two Au certified Rocklab standards Two blanks. <ul style="list-style-type: none"> At least one field duplicate and laboratory duplicate per drill holes or taken every 25 samples. Lab repeats are recorded. Standards, duplicates and blanks are checked after receiving the results. The QAQC results so far has been acceptable The QAQC populations for the exploration program to date have is not large enough to measure accuracy and precision of the sampling program. RRL has a full working pXRF protocol and QAQC procedures for operation of the pXRF for analysis of pulps and samples. PXRF standards and blanks for used as well duplicate data being taken every 25 samples.
Verification of sampling and assaying	<ul style="list-style-type: none"> The verification of significant intersections by either independent or alternative company personnel. The use of twinned holes. Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols. Discuss any adjustment to assay data. 	<ul style="list-style-type: none"> All laboratory assay results were received by RRL stored in both CSV and laboratory signed PDF lab certificates. Data is stored in excel, GIS, Dropbox and Leapfrog. The data storage system is basic but robust. A logging and QAQC standard operating procedure are being constructed. No adjustments have occurred to the assay data.
Location of data points	<ul style="list-style-type: none"> Accuracy and quality of surveys used to locate drillholes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation. Specification of the grid system used. Quality and adequacy of topographic control. 	<ul style="list-style-type: none"> Handheld GPS units (Garmin 62s and 64) were used for placing and picking up the drillhole collars as well as channel and rock chip sampling in New Zealand Transverse Mercator 2000 (NZTM). GPS accuracy was recorded. Reconciliation in GIS using NZ 50 topography map series and LINZ aerial (0.3m) series were also undertaken. LiDAR has been flown but the data and DTM have not yet been received. All drillhole collars will be picked by a surveyor at the end of the program.
Data spacing and distribution	<ul style="list-style-type: none"> Data spacing for reporting of Exploration Results. Whether the data spacing, and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied. Whether sample compositing has been applied. 	<ul style="list-style-type: none"> Channel sampling was taken on 1m intervals where clean exposure was found. Drilling is occurring on 100 to 150m centres with drilling directions and distances being variable because of the terrain and orientation of the target reef. Multiple drill holes are drilled off each drill pad. A moderate dipping hole is drilled first then followed by a steeper drill hole to target down dip. The drill spacing down dip is around 50m.
Orientation of data in relation to	<ul style="list-style-type: none"> Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type. 	<ul style="list-style-type: none"> Channel samples were taken across the mineralisation to sample as true thickness. Drilling design is planned to intercept the mineralisation at high angles but steeper


Criteria	JORC Code Explanation	Commentary
<i>geological structure</i>	<ul style="list-style-type: none"> <i>If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.</i> 	<p>angled drilling with drilling multiple holes from a single heli-drill pad does intercept the mineralisation at a lower angle. Oriented core and intact DC around mineralisation assists in understanding contacts, thickness and mineralisation orientation.</p>
<i>Sample security</i>	<ul style="list-style-type: none"> <i>The measures taken to ensure sample security.</i> 	<ul style="list-style-type: none"> DC and Channel samples taken for the purposes of laboratory analysis were securely packaged on site and transported to the relevant laboratories by Reefton Resources Limited staff. Samples were stored in a locked core shed until despatch.
<i>Audits or reviews</i>	<ul style="list-style-type: none"> <i>The results of any audits or reviews of sampling techniques and data.</i> 	<ul style="list-style-type: none"> No review of sampling techniques and data of recent sampling has been undertaken yet.

Section 2 Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section.)

Criteria	JORC Code Explanation	Commentary
<i>Mineral tenement and land tenure status</i>	<ul style="list-style-type: none"> <i>Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.</i> <i>The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.</i> 	<ul style="list-style-type: none"> The Companies tenements both granted (5), and applications (2) are shown in the map below. All RRL tenements or applications are 100% owned by RRL. All the tenements are within the Department of Conservation (DoC) estate. Minimum Impact Activity (MIA) Access Agreements have been issued by DoC for Alexander River, Big River and Lyell and Reefton South. DoC Access Agreements (AA) that allow drilling have been granted for Alexander River (47 drill pads), Big River (12 drill pads) and Golden Point (22 pads). Variations to the AA's are require for additional drill sites. An AA variation for an additional 28 pads has been applied for at Big River.

--	--

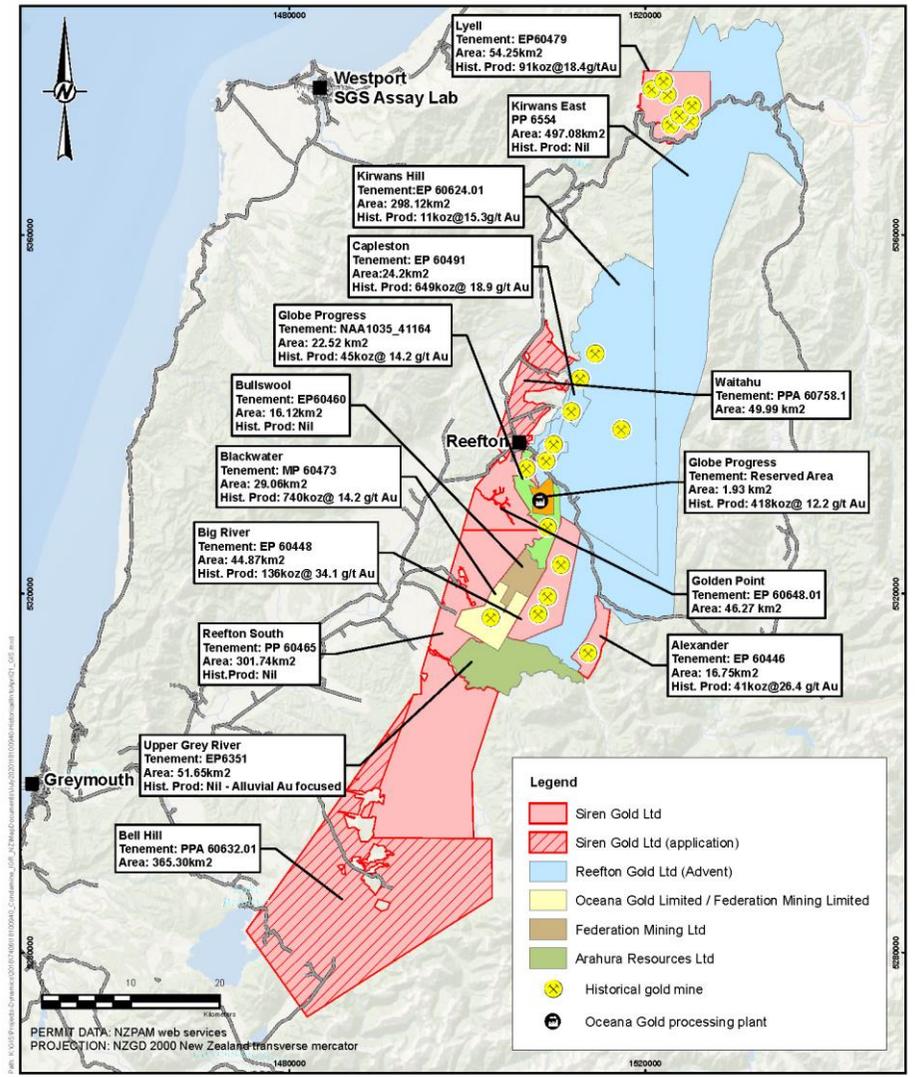

Exploration done by other parties

- Acknowledgment and appraisal of exploration by other parties.

- Please refer to Table 1 of the Siren Gold Ltd IPO Prospectus.
- Zonge Engineering carried out a dipole-dipole resistivity and IP survey over part of the Alexander River tenement in March-April 2010. The survey was carried out using time domain IP equipment, using a GDD GRX-32 receiver with a TXII-1800 transmitter. Dipole-dipole with 50 m dipoles was used for detail and depth information.

Criteria	JORC Code Explanation	Commentary
Geology	<ul style="list-style-type: none"> • <i>Deposit type, geological setting and style of mineralisation.</i> 	<ul style="list-style-type: none"> • Gold mineralisation in the Reefion Goldfield is structurally controlled; the formation of the different deposit types is interpreted to be due to focussing of the same hydrothermal fluid into different structural settings during a single gold mineralisation event, however, some of the deposits (e.g. Globe-Progress, Big River) appear to have been re-worked, with gold and sulphide mineral remobilisation having occurred during a later phase of brittle deformation. • In general, two end members of mineralisation styles exist, the “Blackwater Style” is comprised of relatively undeformed quartz lodes; whilst the “Globe-Progress Style” comprises highly deformed quartz - pug breccia material with a halo of disseminated sulphide mineralisation. • Three main structural deposit types appear to occur in the Reefion Goldfield. The Globe-Progress deposit occupies a distinct structural setting, where there is a clear break in the continuity and tightness of early folding. This break defines the east-west striking Globe-Progress shear zone. The fault splays off the Oriental-General Gordon shear zone. The geometry of the fault structure has allowed dilation and quartz vein deposition more or less contemporaneously with shearing, hydrothermal alteration, and low-grade mineralisation of the wall rocks. The broad disseminated mineralisation that now surrounds the Globe-Progress ore body is thought to have been formed by later movement on fault planes, in the presence of fluids, which led to some mobilisation and recrystallisation of metals and formed the halo of mineralised country rock. The Big River deposit shows similar paragenesis to Globe-Progress, except for the fact that the disseminated sulphide halo is not as extensive. • The second structural deposit type hosts most gold deposits i.e., Big River South, Scotia, Gallant and Crushington, however, these are typically small, narrow, steeply plunging and consequently generally sub-economic. These deposits have formed in reverse shear zones that are parallel or sub-parallel to cleavage and bedding. The attitude of these deposits has not allowed the formation of significant shear zones, dilatant zones or fluid channel ways and consequently the deposits formed tend to be small. Most mineralised zones occur as small-scale versions of the other two deposit types, formed in small, localised transgressive structural settings that are conducive to those deposit types. • The third deposit type occurs as steeply dipping transgressive dilatant structures, which are typically northeast trending (Blackwater). Gold mineralisation is interpreted to have formed when an earlier, favourably orientated shear zone became a zone of weakness under strike-slip movement. This dextral strike-slip movement created a locus for dilation and fluid channelling caused by periodic fluid pumping and over pressuring during the hydrothermal mineralising event.

Criteria	JORC Code Explanation	Commentary
Drillhole Information	<ul style="list-style-type: none"> • A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drillholes: <ul style="list-style-type: none"> ○ easting and northing of the drillhole collar ○ elevation or RL (Reduced Level – elevation above sea level in metres) of the drillhole collar ○ dip and azimuth of the hole ○ down hole length and interception depth ○ hole length. • If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case. 	<ul style="list-style-type: none"> • See Tables 3 and 4 in this announcement.
Data aggregation methods	<ul style="list-style-type: none"> • In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (e.g. cutting of high grades) and cut-off grades are usually Material and should be stated. • Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low-grade results, the procedure used for such aggregation should be stated and some typical examples of such aggregations should be shown in detail. • The assumptions used for any reporting of metal equivalent values should be clearly stated. 	<ul style="list-style-type: none"> • Drilling results presented have used a weighted average when presenting drilling intercepts, hence, any potential sample length bias has been accounted for. • When reporting drillhole intercepts generally a 2g/t cut-off is used.
Relationship between mineralisation widths and intercept lengths	<ul style="list-style-type: none"> • These relationships are particularly important in the reporting of Exploration Results. • If the geometry of the mineralisation with respect to the drillhole angle is known, its nature should be reported. • If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (e.g. ‘down hole length, true width not known’). 	<ul style="list-style-type: none"> • The true drillhole intercept thickness has estimated from sectional interpretation of the mineralised zone.
Diagrams	<ul style="list-style-type: none"> • Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported These should include, but not be limited to a plan view of drillhole collar locations and appropriate sectional views. 	<ul style="list-style-type: none"> • See Figure 1 included in this announcement.

Criteria	JORC Code Explanation	Commentary
Balanced reporting	<ul style="list-style-type: none"> Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results. 	<ul style="list-style-type: none"> See Table 4 in this announcement.
Other substantive exploration data	<ul style="list-style-type: none"> Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances. 	<ul style="list-style-type: none"> Not applicable
Further work	<ul style="list-style-type: none"> The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling). Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive. 	<ul style="list-style-type: none"> Diamond drilling is currently being undertaken at Alexander project with two heli-support drilling rigs. Drilling is planned to continue to the end of 2021 and beyond. 5,000m of diamond core is budgeted for Alexander and Big River projects in 2021, and 500m for Golden Point, at total 10,500m. Year to date 6,985 have been drilled at Alexander, 1,986m at Big River and 258m for a total of 9,103m. A budget for 1,397m remains. Drilling at Alexander will continue to target down dip extensions of the Loftus McKay, Bull and McVicar West shoots (see Figure 1).